

Caution.

Do not use the Base Station outdoors or anywhere likely to be subject to damp, moisture, rain or inflammable vapours.

Do not allow any objects or substance to fall into the Base Station recesses.

Keep the charging contacts on the rear end of torch clean & do not attempt to recharge by any other charger.

Do NOT cut or modify the mains power cord or plug.

Do NOT attempt to open or otherwise repair Base Station - Risk of Death or Serious Injury by electric shock.

Please read and keep these User Instructions and observe all cautions stated. **Do not** use this product for any other purpose than that intended, and do not attempt to insert anything other than the supplied torches into the base station.

Operating Instructions - Safety Station (Base Station) (Refer Fig.1)

1. Place the base station on a flat level surface (or mount it on a wall) as required. For wall mounting, see Fig 3 and refer to mounting instructions on the reverse of this leaflet.
2. Connect mains power cord to suitable outlet. (Note this unit will operate on all worldwide voltages 110v - 240v).
3. The mains power indicator will light whenever mains power is supplied. **NOTE:** If unit is to be stored unused for a prolonged period, disconnect from mains & press RESET twice to disable alarm & floodlights. Do not store unused for more than 3 months to avoid damage to internal backup battery.
4. Place the supplied Mini Magic Torches into the base station as shown (take care to keep wrist strap beside torch to avoid fowling the charge connectors).

Each torch's green charge indicator will blink during re-charging. Each indicator will extinguish when torch is fully charged.

In the event of power failure, the Safety Station will automatically illuminate its built-in floodlights and sound its alarm to guide you to it. Press RESET once to stop the audible alarm, press it again to turn off the floodlights if no longer required.

When mains power is restored the Safety Station will automatically reset itself to normal operation and re-charge the torches if required.

Operating Instructions - Torches

The torches are weather proof and can be used outdoors or indoors. Do NOT submerge torch under water. They are splash proof, but not water tight. Take torches away on vacation / camping / driving / traveling etc. Never be without light anywhere!

1. Press the rubber ON/OFF button to turn torch light on, press it again to turn off.
2. If the torch light begins to dim, the internal Nickel Metal Hydride battery can be recharged anywhere, anytime by unfolding the torch handle and winding it at a constant rate (approx 130 rpm) so that the green charge indicator blinks. 1 minute of winding will enable approx 30 minutes of High Power illumination - great for all occasions! (The handle can be wound in either direction.)
3. The torch can also be recharged by placing it back into the base station. A fully charged torch can provide up to 5hrs of continuous illumination. If the torch is switched off, the unused power will remain stored for several months.

NOTE: Please keep the metal charge contacts clean. Wipe with damp cloth if necessary.

Cleaning the torches & base station

Use a moist towel to wipe the surface of the product only. DO NOT use alcohol or other cleaning solvents which may damage the plastic components.

Base Station Wall Mounting Instructions

Caution.



Locate the Base Station in a suitable dry indoors area. Ideally locate where emergency access is easily available (ie, lobby, entrance hall, staircase etc. Locate away from the reach of pets & toddlers. Do NOT locate immediately above a heating source such as a radiator or fireplace.

Before drilling any holes in a wall, ALWAYS check the wall for hidden obstacles (ie water pipes or power cables). If in doubt, consult a qualified person.

Make sure that other members of your household are aware of the location, and have them read and familiarise themselves with the User Instructions provided.

Installation Instructions - Safety Station (Base Station)

1. Place the base station on a flat level surface (or, optionally mount it on a wall) as required.
2. For wall mounting, choose a suitable place to fix the base station. drill two holes in the wall (7mm Dia) and 56mm apart and level. Insert a suitable wall plug into each hole, and insert M4 x 20mm screw into each wall plug. Leave the screw heads 6mm proud of the wall so that base station lugs can settle around them. (Refer Fig.4) (**Screws & plugs NOT included**).
3. Aim the back of the base station at the two screws on the wall and located it over the screw heads so that the recessed lugs engage over the screw heads. (Refer Fig. 5)

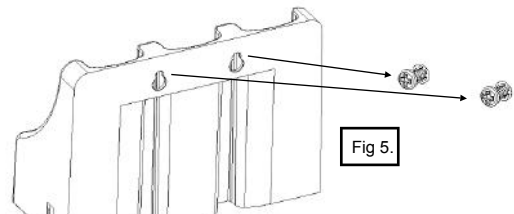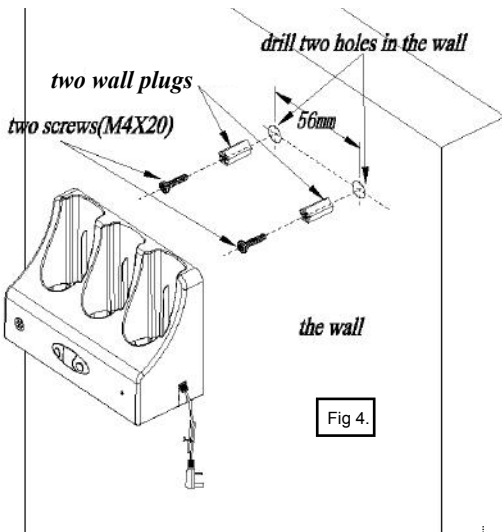

TEMPLATE FOR LOCATING SCREWS

Use this actual size Template to help mark the correct screw hole positions.

