



Designed in the UK



PURE



Move

Rechargeable Palm-sized DAB Digital Radio



A palm-sized compact DAB digital and FM radio, Move™ gives you all the clarity and convenience of DAB digital radio through speaker or headphones in a go-anywhere package with over 40 hours battery life. Now you can take radio with you wherever you go and listen to it however you choose.

Move's compact styling fits comfortably on the narrowest shelf, delivering surprising volume and quality for such a small radio. Pop it in your pocket and listen to the match in the park or at the ground. Use it with headphones without extending the aerial – great while travelling to work, at sports events, or anywhere where you want to listen without disturbing others. And FM reception means you can listen abroad or in areas of reduced DAB coverage.

Despite its compact size Move has a wealth of features including: textSCAN™ to pause and control DAB scrolling text, 20 presets, an auxiliary input for connecting your iPod or MiniDisc player and a mini USB connection for future product upgrades. You can even plug Move's headphone output to your hi-fi and use it as a DAB tuner.

Move's built-in ChargePAK® rechargeable battery pack charges from the mains while you listen and provides over 40 hours of portable DAB listening. Go on, Move!



Rechargeable with over 40 hours battery life




Connect an iPod, CD or MiniDisc



Pause and control scrolling text



Add new features as they become available via USB

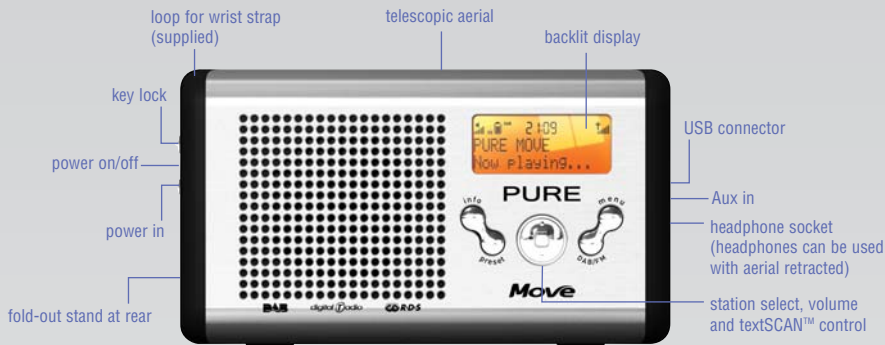

Features



ChargePAK® Inside provides over 40 hours of portable DAB listening and recharges from the mains while you listen



Palm-sized radio – 150 mm x 85 mm x 27 mm



Play your iPod, CD or MiniDisc through Move's speaker



Listen through headphones (mutes speaker) or connect the headphone output to your stereo and use as a DAB tuner



Pause and control scrolling text



20 presets (10 DAB and 10 FM)



Add new features as they become available via USB



FM station name display and RDS scrolling text

TECHNICAL SPECIFICATIONS

Specifications: Palm-sized DAB and FM radio with full DAB Band III reception. Compliant with ETS 300 401 and capable of decoding all DAB transmission modes 1-4 up to and including 192 kbps.

Frequency range: DAB Band III 174-240 MHz, FM 87.5-108 MHz.

Input connectors: 5V DC power adaptor socket (230V supplied), 3.5 mm Aux-in, and Mini USB connector for software upgrades.

Output connectors: 3.5 mm stereo headphone output.

Controls: Power, Lock, Info, Preset, Navigator, DAB/FM and Menu.

Presets: 10 DAB and 10 FM.

LCD display: Orange backlit LCD display with 16 x 2 characters, function icons (volume, battery life, time, EQ, signal strength, DAB/FM and stereo) and clock. Key-press activated backlight can also be set to 'always on' for optimum visibility or 'always off' for longer battery life.

Mains Power supply: 230V AC to 5V (0.6A) DC external power adaptor.

Battery Power supply: ChargePAK-inside Li-ion 4200 mAh rechargeable battery provides over 40 hours of portable DAB listening.

Power consumption: In standby 0.73W (industry average 2.64W); in operation 0.95W (industry average 5.49W).

Approvals: CE marked. Compliant with the EMC and Low Voltage Directives (89/336/EEC and 73/23/EEC).

Dimensions: 150 mm wide x 85 mm tall x 27 mm deep.

Weight: 280g

Aerial: Recessed telescopic aerial supplied. Headphones act as an aerial when connected. (Headphones not supplied.)

Technical support: Our service department is here to make sure you enjoy your PURE product. Call us on +44 (0) 1923 277477, e-mail us at support@pure.com or visit our dedicated support area at www.pure.com.

Warranty: Comprehensive two year warranty for Move; one year warranty for ChargePAK.




EcoPlus

All EcoPlus products are designed and manufactured to minimise their environmental impact, with:

- reduced power consumption (see graph opposite)
- use of materials from recycled and sustainable sources
- reduced packaging size for transport efficiency
- components selected to minimise environmental impact

Move power consumption vs. industry average

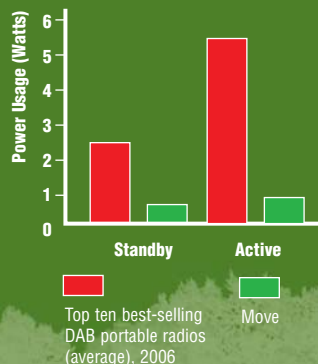

www.pure.com/ecoplus



This is an indication of some of the stations now available on DAB in the UK. We cannot guarantee that all these stations are available in your area, including Northern Ireland. Visit www.pure.com for the list of stations in your area.

Powered by



PURE Digital, Imagination Technologies Ltd., Pinnacle House, Home Park Estate, Kings Langley, Herts, WD4 8DH, UK.

+44 (0)1923 277488 +44 (0)1923 270188 sales@pure.com

Move, textSCAN, ChargePAK, EcoPlus, PURE, the PURE logo, Imagination Technologies and the Imagination Technologies logo are trademarks or registered trademarks of Imagination Technologies Limited. All other logos, products, trademarks and registered trademarks are the property of their respective manufacturers. This publication is for information only. Any contract between Imagination Technologies and its customers will be subject to the terms and conditions of the relevant agreement. Specifications are subject to change without notice. Copyright © 2008 Imagination Technologies Limited, an Imagination Technologies Group plc Company. APRIL 2008. PURE.0056.04.08

Printed on 80% recycled material. Please recycle after use.



PURE

www.pure.com